


Tumble Dryer Vent

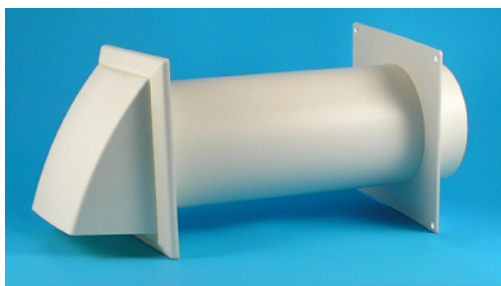

To aid control of condensation and hence reduce high humidity levels and prevent mould growth, Ferrob would recommend the use of a Tumble Dryer vent to an outside wall.

These vents are usually fitted in kitchens and / or utility rooms etc to enable damp air from the dryer to escape from the property.

| Catalogue No. | Type |
|---------------|-------------------------|
| TDR 100 | 100mm Tumble Dryer Vent |

| | |
|---------------------|---|
| Guarantee | Two year no quibble guarantee |
| Installation | The units are designed to be wall mounted at either high or low level and are supplied with an external grille (colours to suit). |